
## E01 FACE LIT CHANNEL LETTERS

Scale: 1/2" = 1'-0"

**HBH-CL-SW-33**

57.4 square feet

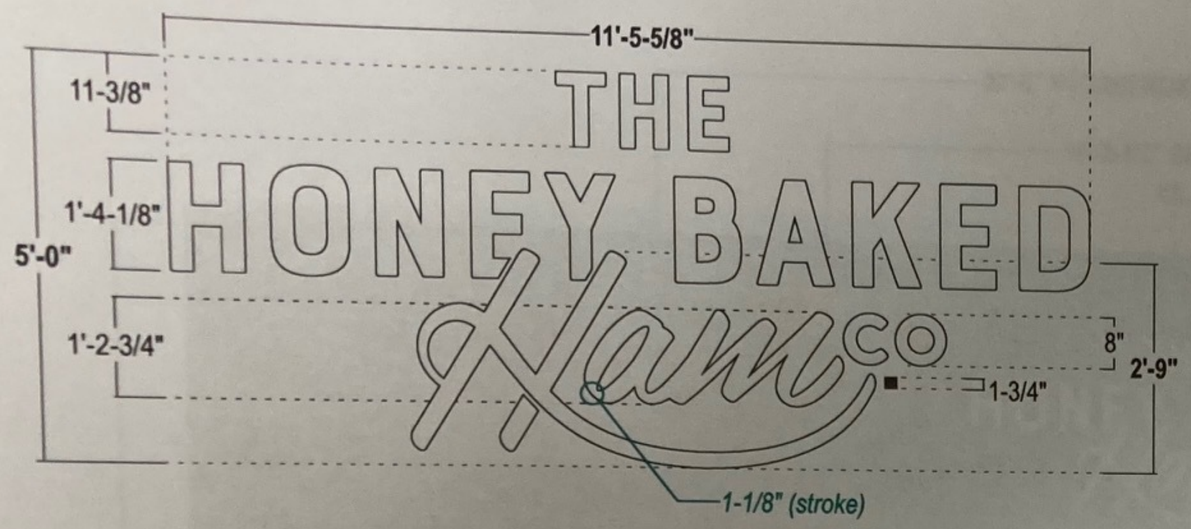


**FACES:** 3/16" #7328 White acrylic faces

**TRIMCAP:** 1" White Jewelite trimcap

**RETURNS:** 5" deep .040 alum returns - Insides pre-painted White; Outsides painted Iron Mountain

**BACKS:** .063 alum. backs - pre-painted White

**ILLUM.:** White LEDs as required by manufacturer;
**Remote Power Supplies**

**®:** .080 alum. panel - Painted to match wall; Panel to have surface applied die-cut vinyl;
Panel drilled & tapped to accept studs for flush mounting;
All penetrations filled with silicone

**WALL MAT.:** Signband wall material is EIFS

**INSTALL:** Thru bolted using all thread into blocking as required;
12" standard length of threaded rod will be supplied unless otherwise noted;
3/8" threaded rod into blocking or Stratus approved equivalent;
Compression sleeves required to avoid crushing wall & achieve max tensioning
Compression sleeves required to avoid crushing wall & achieve max tensioning

**QUANTITY:** **(1) ONE CHANNEL LETTERS SET REQUIRED FOR FRONT ELEVATION**

**ALL SIGNS TO COMPLY WITH UL 48 AND WILL BE MARKED AS SUCH WITH APPROPRIATE LABORATORY LABELS.**

THIS SIGN IS INTENDED TO BE INSTALLED IN ACCORDANCE WITH THE REQUIREMENTS OF ARTICLE 600 OF THE NATIONAL ELECTRICAL CODE AND/OR OTHER APPLICABLE LOCAL CODES. THIS INCLUDES PROPER GROUNDING AND BONDING OF THE SIGN.

THE LOCATION OF THE DISCONNECT SWITCH AFTER INSTALLATION SHALL COMPLY WITH ARTICLE 600.6(A) (1) OF THE NATIONAL ELECTRIC CODE.

**COLOR PALETTE**


White
3M 7725-10 White

**WALL COLOR:**
SW 7567 Natural Tan
-TBD

BM 2134-30 Iron Mountain

**Paint finish to be satin unless otherwise specified**



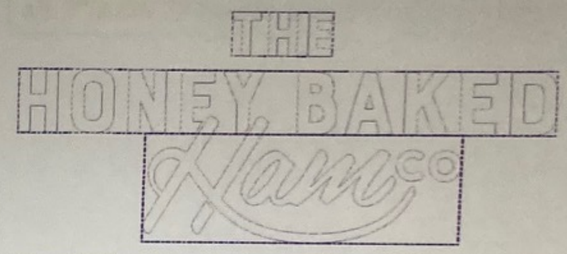




**ALTERNATE BOXED SQUARE FOOTAGE: 33.9 Sq.ft**

**NIGHT VIEW**

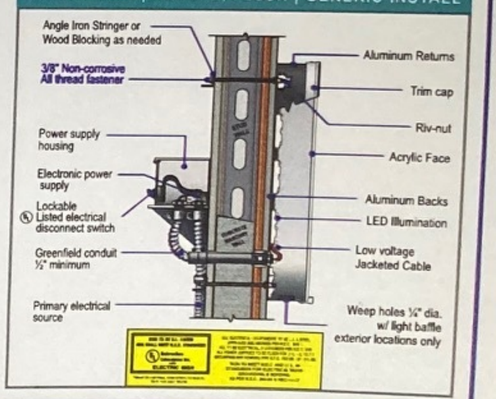


**FACE LIT LED | REMOTE, FLUSH | GENERIC INSTALL**




Stratus
onestratus.com
888.503.1569

CLIENT: THE HONEY BAKED Ham CO

ADDRESS: 3213 MAIN STREET STE 2
BROADWAY CROSSING
BRYANT, AR 72022

PAGE NO.: 4

ORDER NUMBER: 1245621

SITE NUMBER: 1218

PROJECT NUMBER: 79782

PROJECT MANAGER: ROBYN PHILLIPS

ELECTRONIC FILE NAME: G:\ACCOUNTS\H\HONEYBAKED HAM\2025\AR\1218_Bryant R2

| Rev # | Req # | Date/Artist | Description | Rev # | Req # | Date/Artist | Description |
|---|---|---|---|---|---|---|---|
| Original | 554434 | 09/23 /25 Z-SA | | | | | |
| Rev 1 | 556180 | 10/03/25 Z-MH | Removed option A | | | | |
| Rev 2 | 558358 | 10/15/25 Z-SA | Updated sign | | | | |