
TREE TYPES	TREE SPECIES	QUANTITIES	HEIGHT AT MATURITY	CALIPER
SHRUBS	DWARF YAUPON HOLLY	36	3'-5'	Wide 3'-6'
EVERGREEN TREE	TAYLOR JUNIPER	68	15'	>2"


LANDSCAPE LEGEND

COMMON NAME:	BOTANICAL NAME:	HEIGHT AT MATURITY:	QTY.:
SHURBS COMPACTA HOLLY - 6' O.C. - 5 GAL.	GLOSSY ABELIA / ABELIA X GRANDIFLORA	6'-0"	REFER TO PLAN
EVERGREEN TREES	CHOOSE FROM LIST OF SPECIES INCLUDED IN THE CITY OF BRYANT LANDSCAPING CODE		-
SOD (INCLUDES MULCH BEDS)	BERMUDA		



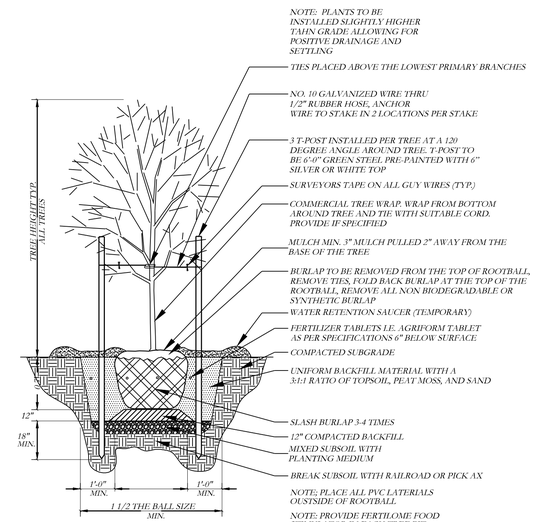

1 TREE PLANTING DETAIL
No Scale

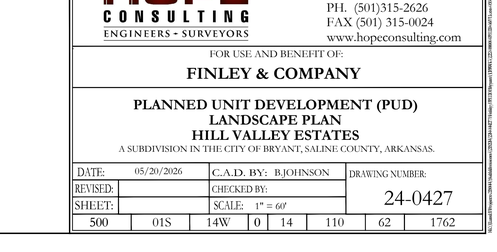

NOTES:
1. PROVIDE WEED CONTROL AND/OR FERTILIZER AS SPECIFIED BELOW.
2. WEED CONTROL AND FERTILIZER MAY BE APPLIED AT A LATER DATE TO COMPLY WITH SEASONAL CONDITIONS AND THE GROWING PERIOD.
3. PROVIDE AGRIFORM TABLETS AS PER MANUFACTURERS RECOMMENDATIONS.
4. PROVIDE HOMOGENOUS BACKFILL PLANTING MIXTURE OF 3:1 RATIO TOPSOIL TO PEATMOSS AND/OR OTHER APPROVED SOIL ADMENDMENTS.
5. PROVIDE FERTILOME ROOT STIMULATOR OR APPROVED EQUAL IN PITS.
6. APPLY BALAN PREEMERGENT WEED CONTROL OR APPROVED EQUAL TREATMENT ON ALL SHRUB AND GROUNDCOVER BEDS.

2 SHRUB PLANTING DETAIL
NTS

GENERAL NOTES

QUANTITIES SHOWN ARE FOR CONVENIENCE ONLY. CONTRACTOR SHALL BE RESPONSIBLE FOR MAKING THEIR OWN COUNT.

ALL SHRUBS AND TREES SHALL RECEIVE PLANTING BACKFILL OF 2/3 TOPSOIL AND 1/3 COMPOST BY VOLUME AND 2 LBS OF 14-14-14 TIMED-RELEASE FERTILIZER PER CUBIC YARD OF BACKFILL.

ALL BEDS INSIDE LAWN AREAS TO BE EDGED WITH 4" PAINTED STEEL EDGING.

TOPSOIL SHALL BE ADDED AS NEEDED TO CREATE A SMOOTH FINISH GRADE ON PLANTING AND SODDED AREAS.

ALL TREES AND SHRUBS SHALL BE THOROUGHLY WATERED IMMEDIATELY AFTER PLANTING.

ALL NON-PAVED AREAS NOT SHOWN AS PLANTING BEDS SHALL BE SODDED WITH SOLID TIFWAY 419 BERMUDA SOD. CONTRACTOR SHALL CALCULATE ALL SODDED AREAS.

NO TREES MAY BE PLANTED WITHIN 5' OF PUBLIC UTILITIES. MAINTAIN 5' SEPARATION BETWEEN TREES AND ANY EXISTING / PROPOSED UTILITY MAINS.

MAINTENANCE OF LANDSCAPING

THE OWNER, TENANT, OR AGENT, IF ANY SHALL BE RESPONSIBLE FOR PROVIDING, PROTECTING AND MAINTAINING ALL LANDSCAPING IN HEALTHY GROWING CONDITIONS, REPLACING IT WHEN NECESSARY TO ENSURE CONTINUOUS CONFORMANCE WITH THESE GUIDELINES AND KEEPING IT FREE FROM REFUSE AND DEBRIS. MAINTENANCE SHALL INCLUDE THE REPLACEMENT OF ALL DEAD PLANT MATERIAL WITHIN THE GUARANTEED CONTRACT PERIOD.

HOPE CONSULTING
ENGINEERS - SURVEYORS
129 N. Main Street,
Benton, Arkansas 72015
PH. (501)315-2626
FAX (501) 315-0024
www.hopeconsulting.com

FOR USE AND BENEFIT OF:
FINLEY & COMPANY

PLANNED UNIT DEVELOPMENT (PUD)
LANDSCAPE PLAN
HILL VALLEY ESTATES
A SUBDIVISION IN THE CITY OF BRYANT, SALINE COUNTY, ARKANSAS.

DATE:	05/20/2026	C.A.D. BY:	B.JOHNSON
REVISED:		CHECKED BY:	
SHEET:		SCALE:	1" = 60'

DRAWING NUMBER: 24-0427

500	01S	14W	0	14	110	62	1762

R:\Land Projects\2024\Landdevelopment\2024-0427\Data\PDWG\LDD-24-0427.dwg, 05/20/2026 10:38:00 AM, Brandon Hall, 1:1