LANDLORD APPROVAL

_____

_____ **DATE:**

ARKANSAS SIGN & NEON
8525 DISTRIBUTION DR.
LITTLE ROCK, AR 72209
501.562.3942 (P)
501.562.6651 (F)
arkansassign.com

REPRESENTATIVE: DAVID ASHLEY
DATE/DWG: 03/06/2023 - DWG1
DESIGNER: LORA RAND

ALL IDEAS, DESIGNS AND ARRANGEMENTS INDICATED OR REPRESENTED BY THIS DRAWING (EXCEPT FOR REGISTERED TRADEMARKS) ARE OWNED BY AND ARE THE PROPERTY OF ARKANSAS SIGN & NEON. USE OF THIS DOCUMENT IS PROHIBITED UNLESS WRITTEN AUTHORIZATION IS OTHERWISE GIVEN.

DELIVERY TIMES VARY PER SCOPE OF WORK. TYPICAL DELIVERY TIME FROM ACCEPTANCE AND PERMITTING ARE 4-8 WEEKS. OUR GOALS IS TO DELIVER IN A TIMELY MANOR BARRING UNFORSEEN CIRCUMSTANCES.

CUSTOMERS IS RESPONSIBLE TO OBTAIN ANY/ALL LANDLORD APPROVALS IF APPLICABLE.

UL Listed

CLIENT: ECO CONST/1ST SECURITY
LOCATION: 1823 N. REYNOLDS RD, BRYANT AR 72022

SIGNATURE OF APPROVAL REQUIRED FOR PRODUCTION

rev1

raceway allows for only one electrical hole for the entire set of letters and logo to be drilled in wall and with fewer mounting holes

raceway is 7” tall x 4” deep to be painted to match bldg

PMS-321

channel letter



SPECS:
(1) SET OF LED ILLUMINATED CHANNEL LETTERS, FLUSH-MOUNTED (RECOMMEND RACEWAY), BLACK RETURNS, BLACK TRIMCAP, ACRYLIC FACES W/ VINYL APPLIED 1ST SURFACE LOGO TO HAVE TEAL VINYL, LETTERS TO HAVE PERFORATED PRINT VINYL FOR COLOR DAY APPEARANCE,/ WHITE NIGHT APPEARANCE


NORTH ELEVATION

PROPOSED DAY VIEW



PROPOSED NIGHT VIEW




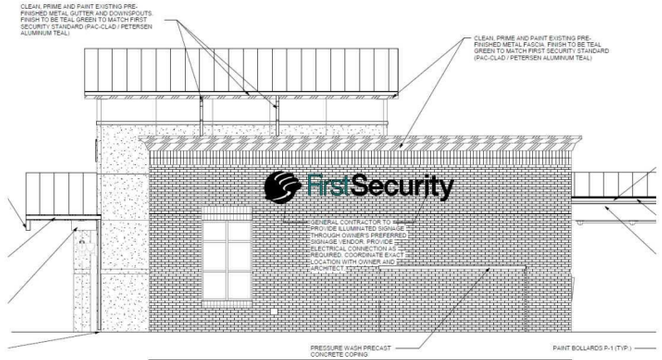



IF YOUR SIZES (3’/2’) ARE CORRECT
THEN THIS IS HOW IT WILL
APPEAR ON THE BUILDING

NOTE: ANY NEEDED WALL REPAIRS ARE NOT ASN RESPONSIBILITY. ANY VIEWS SHOWING REPAIRS ARE FOR VIEWING ONLY.

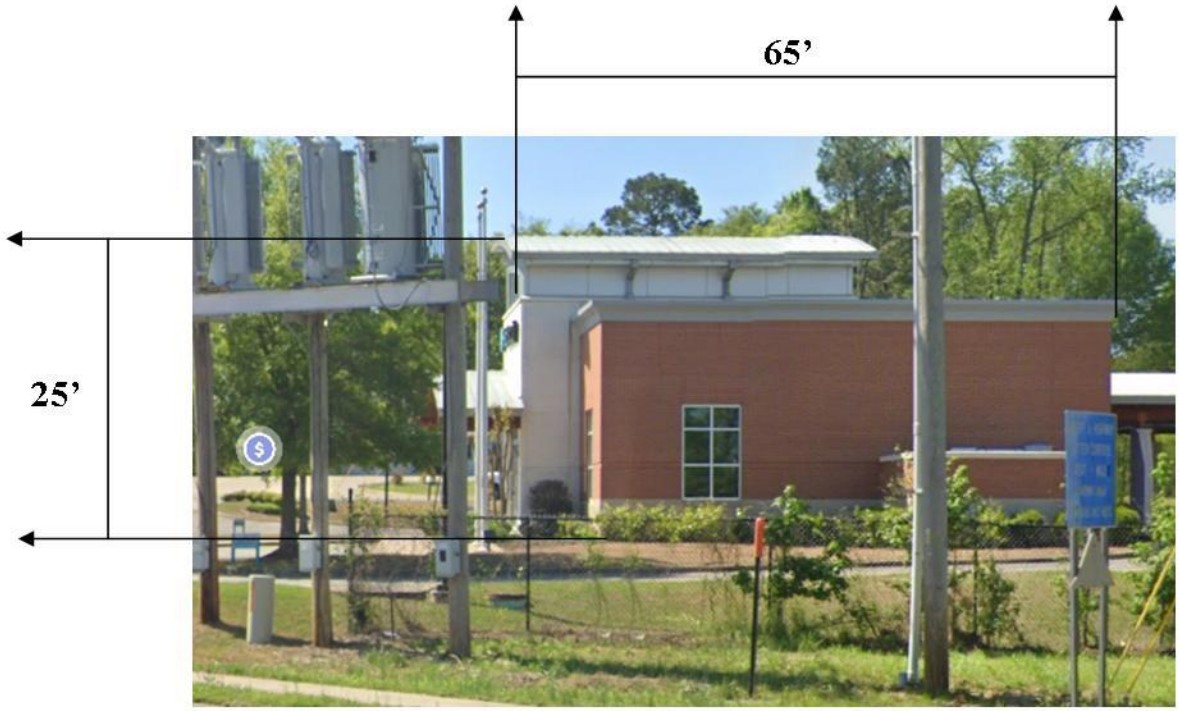
65’
25’

NORTH ELEVATION



